

Reduced Pressure, Non-Metallic Lower, Bolted

TYPE 10L



- Intended for corrosive or viscous pressure media
- Designed for applications where typical metallic lower housings cannot withstand process media
- Can be used for remote mounting of pressure instrument(s) with capillary
- Utilizes a replaceable diaphragm clamped between the flanged housings with an o-ring seal to create a leak-free union
- Process connection sizes from 1/4" NPT through 1-1/2" NPT
- Consider instrument size, pressure range, media composition, ambient and operating temperature, and maximum working pressure when selecting
- Fill fluid must be compatible with process media; i.e. Glycerin may become volatile in conjunction with a strong oxidizing agent such as chlorine, forms of oxygen or peroxide and nitric acids

APPLICATIONS

- Water and wastewater
- Oil and gas
- Petrochemical
- Chemical processing
- Industrial automation
- Marine
- Agriculture
- Steel fabrication
- Mud pumping
- Pulp and paper
- Pneumatic

SPECIFICATIONS

Seal type	Threaded with replaceable diaphragm. Flanged available on request.			
Instruments	Type	Size	Minimum Pressure	Maximum Pressure
	Gauges	2-1/2" to 6"	0 psig to 30 psig	0 psig to 200 psig
	Transducers	-	0 psig to 30 psig	0 psig to 200 psig
	Switches	-	0 psig to 30 psig	0 psig to 200 psig
Upper housing	Type	Non-continuous duty		
	Connections	1/4" NPT, 1/2" NPT		
	Materials	Polyurethane enamel coated Steel, 316 Stainless Steel		
Diaphragm	Size	3.0"		
	Displacement	3.2 ml		
	Materials	316 Stainless Steel, FKM, PTFE (Exotic materials available on request)		
O-rings	NBR, PTFE and FKM			
Lower housing	Connections	1/4" NPT, 1/2" NPT, 3/4" NPT, 1" NPT, 1-1/4" NPT, 1-1/2" NPT		
	Materials	PVDF, PP, PVC, PTFE (Other materials available on request)		
Bolting	Zinc-plated Steel, optional stainless Steel			
Operating temperature	Operating temperature is determined by the temperature/pressure configuration. See Material Temperature table.			

For NOSHOK Diaphragm Seals with Carbon Steel lower housing materials:



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For NOSHOK Diaphragm Seals with Stainless Steel lower housing materials:



WARNING: This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


ORDERING INFORMATION				
TYPE	10L			
INSTRUMENT CONNECTION SIZES	02 1/4" NPT	04 1/2" NPT		
UPPER HOUSING MATERIALS	C Carbon Steel	S 316 Stainless Steel		
DIAPHRAGM MATERIALS	A Tantalum	M Monel 400	S 316 Stainless Steel ¹	U Titanium Grade 4
	H Hastelloy C - 276	N Inconel 600	T PTFE ³	V FKM ²
O-RING MATERIALS	B NBR	T PTFE	V FKM	
PROCESS CONNECTION SIZES	02 1/4" NPT	06 3/4" NPT	10 1-1/4" NPT	12 1-1/2" NPT
	04 1/2" NPT	08 1" NPT		
	(ASME and DIN flanges available upon request)			
LOWER HOUSING MATERIALS	KN PVDF	PV PVC	TG PTFE (Glass filled)	
	PP PP	TC PTFE (Carbon filled)		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

¹ NBR o-rings standard with 316SS diaphragm
² FKM o-rings standard with FKM diaphragm
³ PTFE o-rings standard with all other diaphragms

EXAMPLE

Type 10L
 Instrument connection size 1/4" NPT
 Upper housing material 316 Stainless Steel
 Diaphragm material PTFE
 O-ring material PTFE
 Process connection size 1/2" NPT
 Lower housing material PP

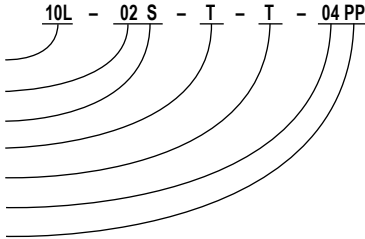

Type 10L PTFE (Carbon & Glass Filled) Type 10L PVC / PP / PVDF

